


Quick Installation Guide


Blueberry Industrial Managed Fast- and Gigabit 19" Ethernet Switches

● **BM-1900 series**

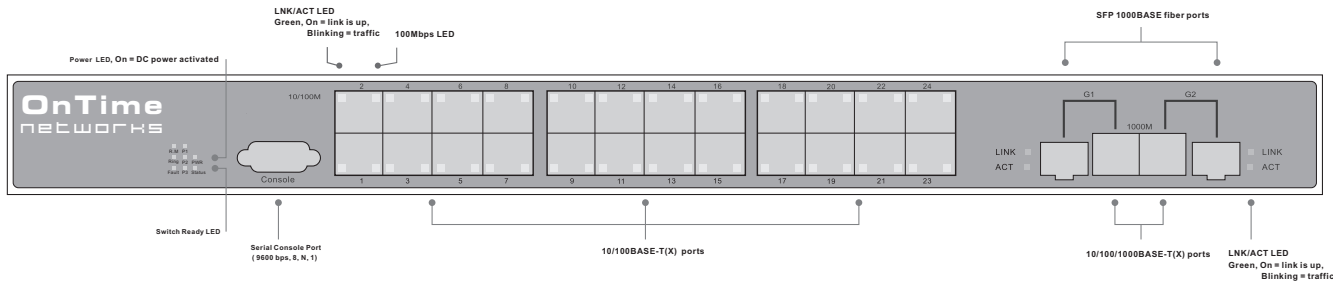


Interfaces	Description
10/100BASE-T(X) RJ45 ports	10/100Base-T(X) RJ-45 fast ports supporting: Auto-negotiation Default Setting: Speed: auto Duplex: auto Flow control: disable PoE enabled
10/100/1000BASE-X	2 x 10/100/1000BASE-X combo ports
Fiber port	2 x 1000BASE-X SFP ports
Console port	Use the RJ-45-RS232 converter cable to manage the switch
Terminal block (bottom)	Terminal block includes: PWR1, PWR2(12-48V DC) and Relay output (1A@24VDC)

● **Installation**

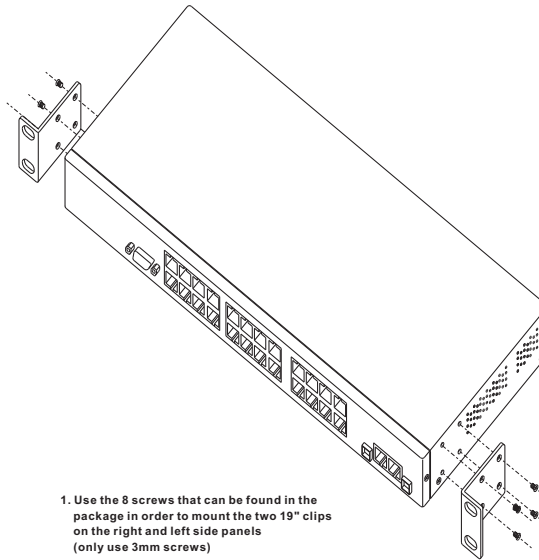

1. Use the 8 screws that can be found in the package in order to mount the two 19" clips on the right and left side panels (only use 3mm screws)
2. Mount the switch in the 19" rack



● **Dimensions**

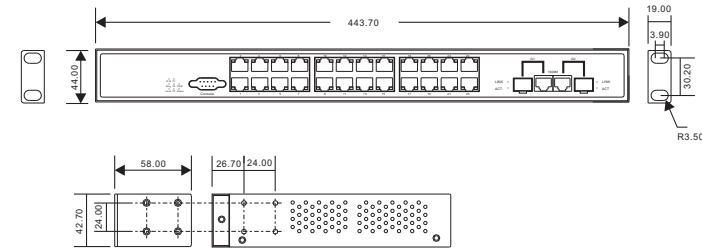

● **Accessories**

① Rack-mounted kit (L&R)


② Console Cable



③ Screw (M3 X5)

④ QIG

⑤ CD



● **Power connection**



● **Packing list**

Model name	Model Description	Accessories
BM-1900	26 - port Managed Ethernet switch, 24 x 10/100BASE-TX and 2 x 10/100/1000BASE-X combo ports	① X 1, ② X 2, ③ X 2, ④ X 1, ⑤ X 1